



Refrigerador de botellas de vino sobremesa

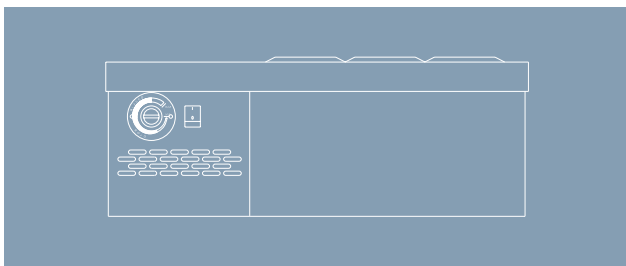

V-6
142406700003

On counter wine bottle cooler

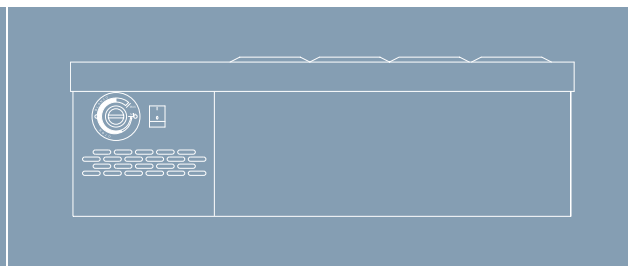

V-8
142406700004

Características Técnicas

Technical Data

REF.	LARGO LENGHT	ALTO HEIGHT	FONDO DEPTH	POTENCIA FRIG FRIG POWER	CONSUMO CONSUMPTION	CAPACIDAD Ø 80 mm. máx. CAPACITY Ø mm. máx.	PESO NETO NET WEIGHT	TENSIÓN MONOFÁSICA SINGLE PHASE VOLTAGE	REFRIGERANTE COOLANT
V-6	600 mm	220 mm	350 mm	94 W	0,7 A	6 Bot.	16 ud	220 V - 50/60 Hz	R-134a
V-8	715 mm	220 mm	350 mm	94 W	0,7 A	8 Bot.	19 ud	220 V - 50/60 Hz	R-134a

Características Técnicas

Characteristics

- Exterior en acero inox AISI-304.
- Interior en aluminio.
- Aislamiento densidad 25 Kg/m³.
- Desagüe en la parte trasera.
- Interruptor general ON - OFF.
- Unidad condensadora ventilada.
- Evaporador por placa fría.
- Control de temperatura por termostato.
- Selección de temperatura para vino tinto o blanco.
- Capacidad para botellas de ø80mm máximo.
- Temperatura de trabajo: +5° +18° a 32°C ambiente.

- *Stainless-steel exterior.*
- *Aluminium interior.*
- *25 Kg/m³ insulation density.*
- *Dripping tube in rear.*
- *ON - OFF main switch.*
- *Ventilated condenser unit.*
- *Rold bond evaporator system.*
- *Temperature control by thermostat.*
- *Red o white wine temperature selection.*
- *ø80mm maximum storage capacity.*
- *Working temperature: +5° +18° a 32°C ambient temperature.*



V-8



V-6

